


Online Turbidity/SS Analyzer

Flumsys 10TC-T1

The Flumsys 10TC Single Channel Digital Controller is designed to measure a range of water quality parameters relevant to the water treatment industry and can be customised to measure a single parameter, supporting JENSPRIMA sensors only. The 4.3" colour LCD display is touch operated and very easy to set up. This series controller has data storage function, support USB Disk data export. Provides three programmable relays and two 4-20mA outputs for controlling auxiliary equipment, RS485 Modbus RTU communication is standard.

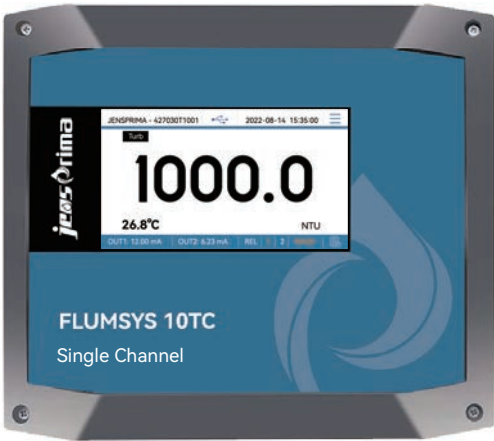

innoSens 810T Turbidity/SS Sensor

● JENSPRIMA turbidity sensor have been developed based on the 90 ° light scattering principle in accordance with EN ISO 7027. When light passes through a solution, part of it is absorbed and scattered, and the other part passes through the solution, which makes it possible to measure the turbidity/suspended matter of a water sample by measuring the intensity of the scattered light from the particles in the water.

- Measuring range: 0-4000NTU
- Resolution: 0.1NTU, 0.1mg/L, 0.1ppm
- Accuracy: ±2%fs.
- Size: 42mm diameter, 120mm length
- Threaded connection: 1"GAS
- Cable: 10m as standard
- Pressure: Max.4bar
- Working temperature: 0-60°C
- Protection class: IP68
- Material: 316L/PVC



Order No.	Description
35-0810-02	innoSens 810T Turbidity/SS Sensor

Measurement parameters

Turbidity: 0-4000NTU

Feature


- Single channel measurement, need to select the corresponding sensor
- Wide power input, touch screen design
- 4.3" colour touch screen displays measured value, temperature and relay status
- Chinese/English menu, easy to operate
- Password protection to prevent unauthorised operation
- New calibration step-by-step prompts can help reduce operating errors
- 2x programmable Hi/Lo relay outputs
- Programmable auto-purge relay outputs
- 2x isolated 4-20mA outputs
- RS485 Modbus RTU communication
- Data storage function, support for USB stick data export

Technical parameters

- Display: 4.3" colour LCD touch screen display
- Language: Chinese/English
- Password: Setup mode: 0022, Calibration mode: 0011
- Power supply: 110-240VAC, 50/60Hz; 24VDC Optional
- Current output 1: Isolated 4-20mA output, measurable value can be set, maximum load 500Ω.
- Current output 2: Isolated 4-20mA output, measurable value can be set, maximum load 500Ω.
- Digital communication: RS485 Modbus RTU
- Alarm output: 2 sets of programmable Hi/Lo contacts with hysteresis setting 5A/250VAC/30VDC
- Cleaning relay: Cleaning interval:0.1-1000h, Cleaning time:1-1000S
- Working temperature: 0-70.0°C
- Storage temperature: -20-70.0°C
- Protection class: IP65
- Installation: Wall mounting
- Size: 200×180×90mm
- Weight: ca.1kg

Order Guide

Order No.

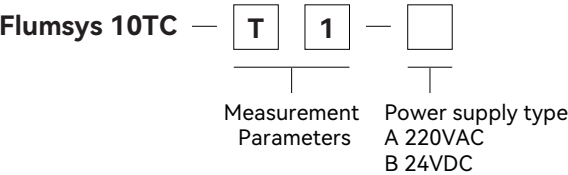

For example, if you select turbidity/SS sensor, 220VAC, the model number is Flumsys 10TC-T1-A.